AP40.10-P-4054R	TIREFIT puncture sealing compound - check expiry date	11.6.01

MODEL 163, 168, 170

MODEL 171, 203, 209, 230, 240, 414 except CODE (669) Spare tire on steel rim

MODEL 209, 211.004 /006 /016 /023 /026 /028 /042 /043 /061 /065 /070 /080 /082 /083 /206 /216 /223 /226 /242 /243 /261 /265 /270 /280 /282 /283 /606 /616
except CODE (679) Spare tire in structural wheel design
except CODE (690) Compact spare tire as emergency wheel

MODEL 211.076/ 276

Model 170, 171, 203, 209, 230
Shown on model 230


1 Date of manufacture
2 Expiration date
3 Trunk floor paneling



P40.10-2522-06

Model 168


1 Date of manufacture
2 Expiration date
3 Trunk floor paneling

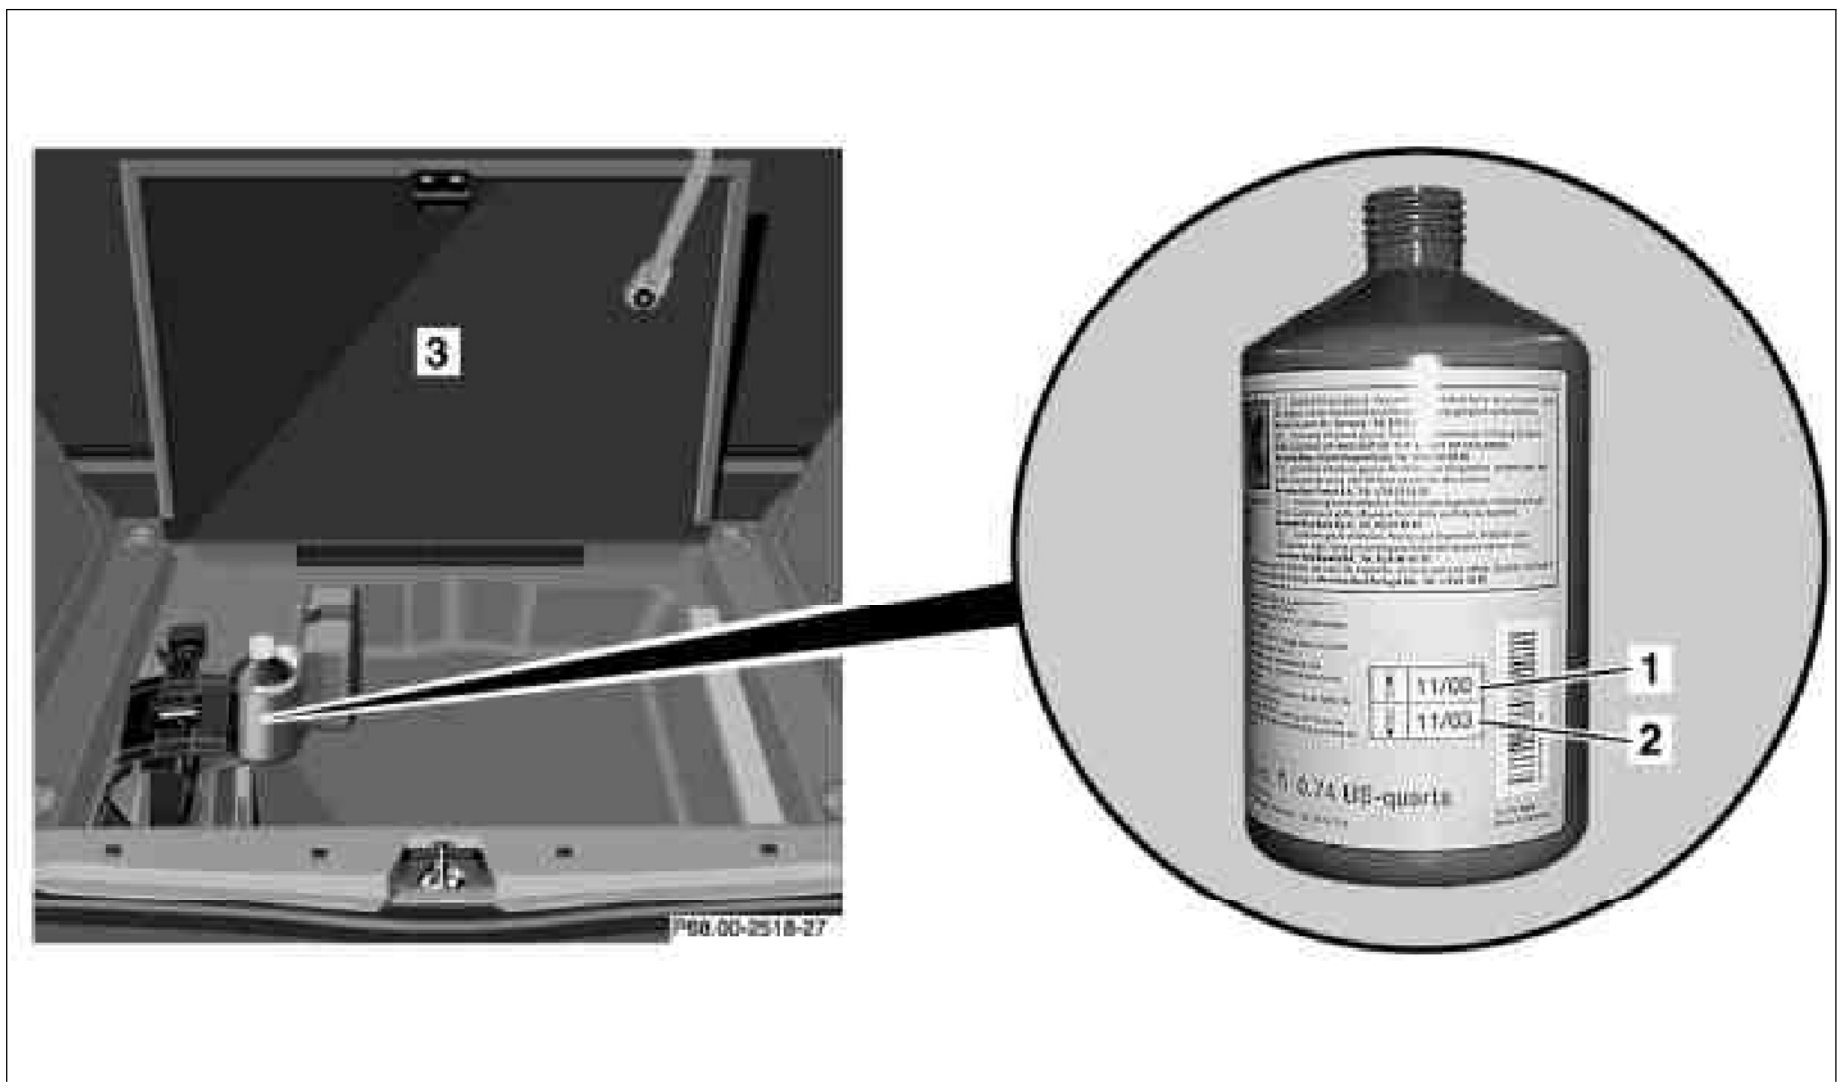

P40.10-2530-05

MODEL 211.0


1 Date of manufacture
2 Expiration date
3 Trunk floor paneling

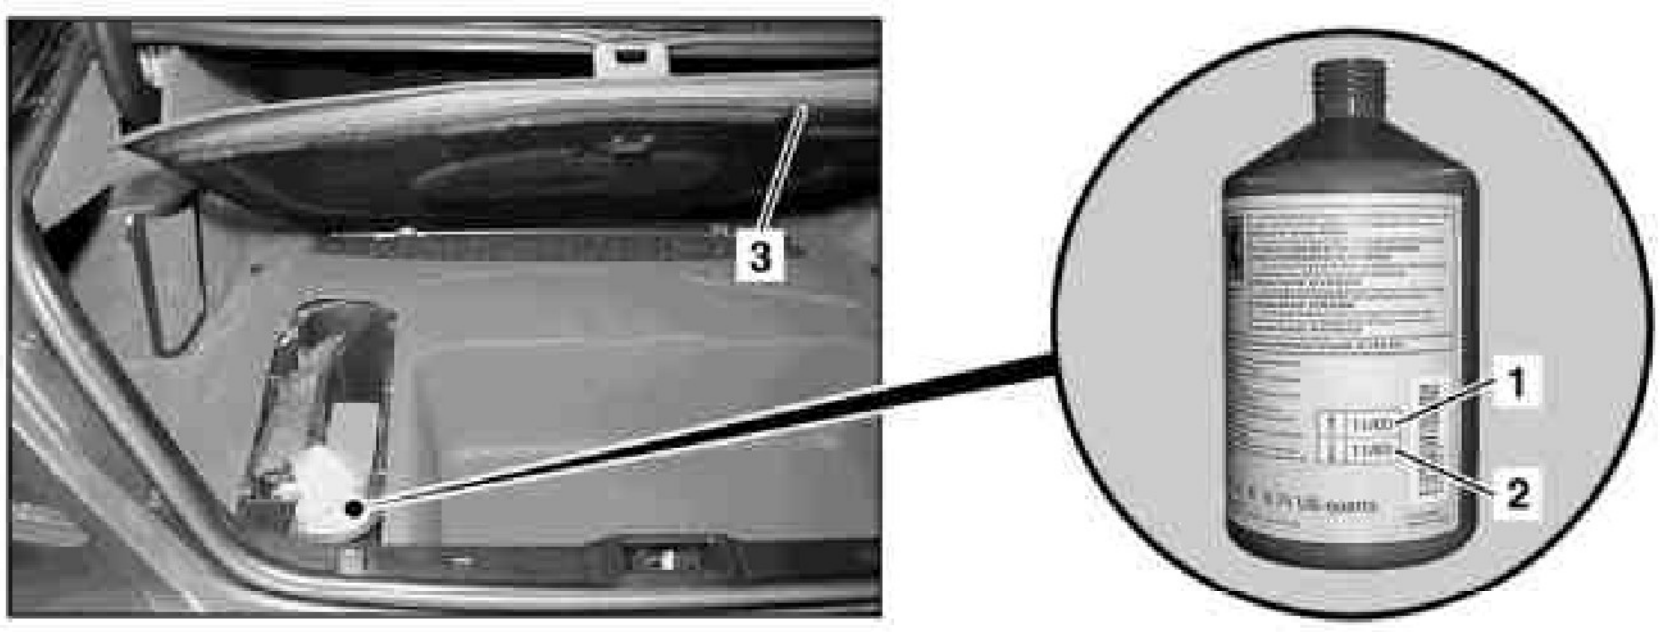

P40.10-2643-04

MODEL 211.2


1 Date of manufacture
2 Expiration date
5 Load compartment floor

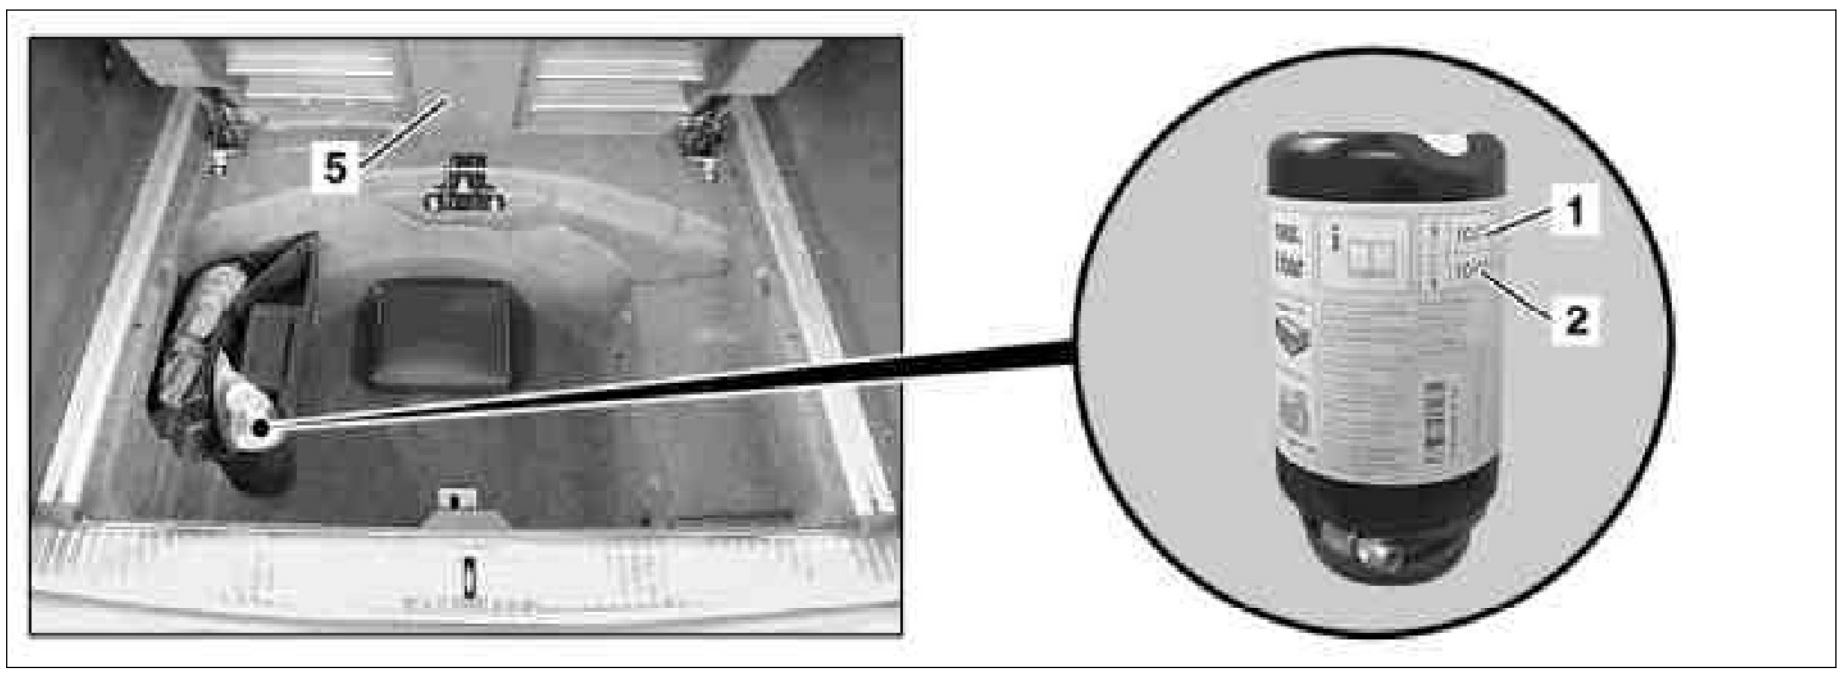

P40.10-3010-04

Model 240


1 Date of manufacture
2 Expiration date
3 Trunk floor paneling

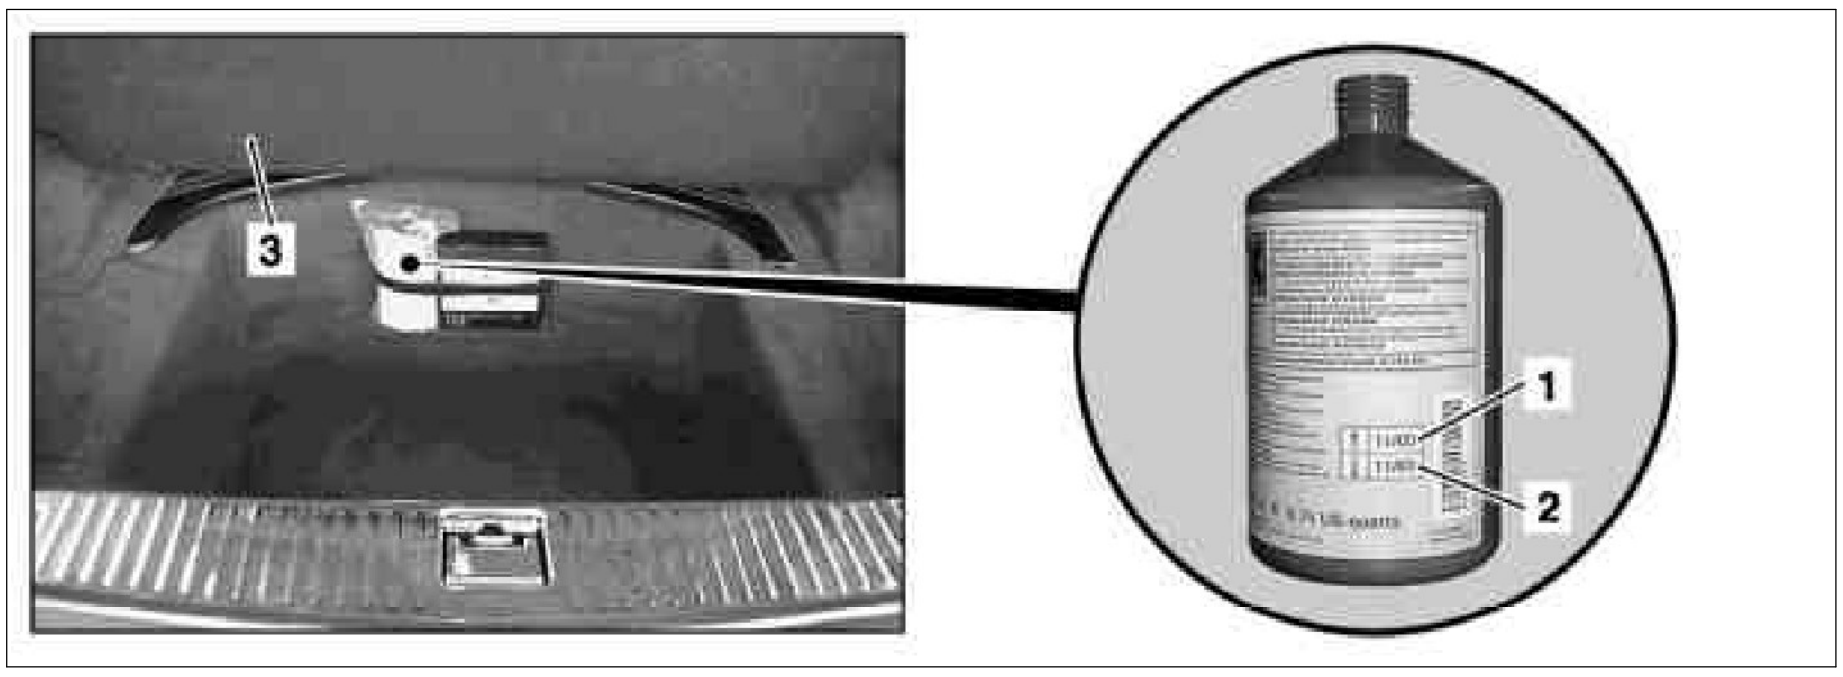

P40.10-2803-04

Model 163, 414
Shown on model 414

1 Date of manufacture
2 Expiration date
4 Left side paneling

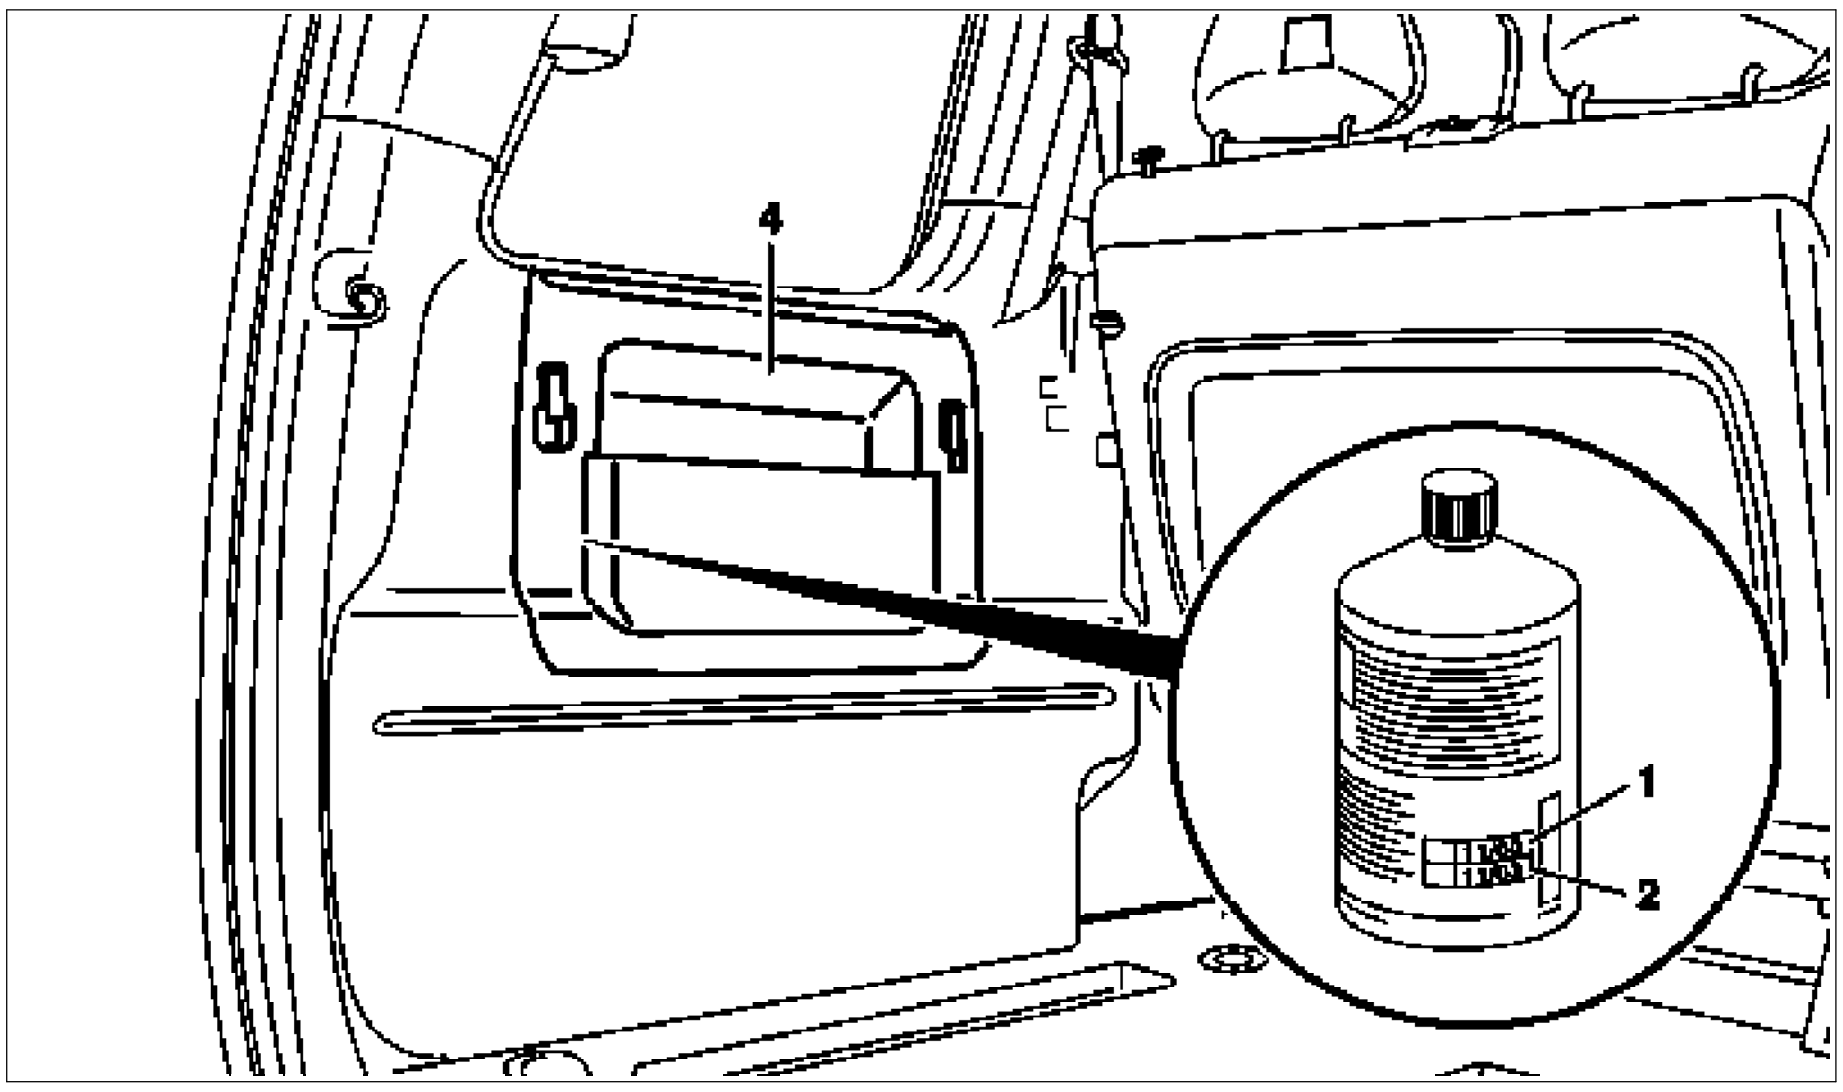

N42.10-2129-05

	Remove/Install		
1.1	Open luggage compartment lid	Model 170, 171, 203, 209, 211.0, 230, 240	
1.2	Open tailgate	Model 163, 168, 211.2, 414 Model 211.6: The place where the TIREFIT tire repair kit is kept can vary depending on the vehicle body, see body manufacturer's operating manual.	
2.1	Lift trunk floor paneling (3), remove if necessary.	Model 168, 170, 171, 203, 209, 211.0, 230, , 240	
2.2	Lift load compartment floor (5)	Model 211.2	
2.3	Open left side paneling (4) in luggage compartment	Model 163, 414	
	Check		
3	Check expiration date (2) on the bottle. TIREFIT tire sealant	TIREFIT tire sealant has a shelf life of 3 or 4 years depending on the version, measured from the indicated date of manufacture (1). The tire sealant must be replaced after this date. Dispose of used or old TIREFIT in a container for paintshop waste (see Workshop Equipment Manual, Volume 2, Chapter U, Group 00 (22), Subject 2.3). Fire hazard! No fire, naked flames or smoking. Avoid formation of sparks. Do not inhale vapors.	AH40.10-P-0001-01A
4	Install in the reverse order		